

Elixo 800 230 V RTS

Motorization for sliding gates

UP TO 10 M | 800 KG

Collective housing | Semi-intensive use



Motor ground fixation

Reliable and hard-wearing for sliding gates

Easy to install

- > Easy access to ground fixation screws from the top
- > No adjustment needed from the installer

Reliability and durability


- > Mechanical design based on 30 years of group experience
- > Soft stop

Convenient to use


- > Easy key unlocking from inside

Standard installation

1. Elixo 800 230 V RTS
2. Orange light
3. Outdoor antenna

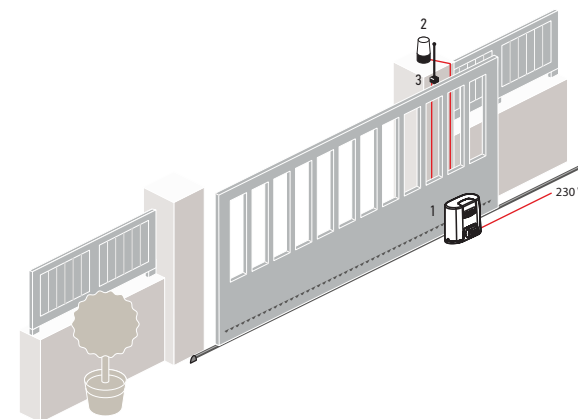

General overall size

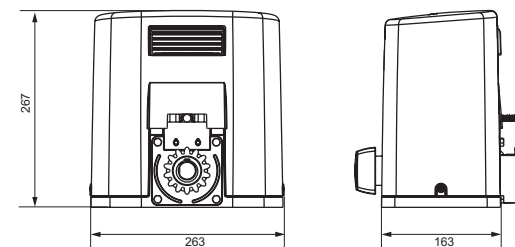

Technical characteristics

Mains power supply	230 V (-15% / +10%) - 50 Hz	Thrust force	800 N
Motor voltage	230 Vac	RTS radio frequency	433.42 MHz
Maximum power consumption	300 W	Number of remote controls	128 channels maximum
Accessories power supply	24 Vac / 360 mA	Index of protection	IP 24
Opening time to 3 m	21 s	Operating temperature	-20°C to +60°C

Special accessories



Radio keypad metal RTS
More information on page 144

Ref. 1841111 (France)
Ref. 1841116 (International)




Video door phones
More information on pages 154 to 170

Ref. 1841111 (France)



1 meter steel rack
More information on page 73

Ref. 9011069



Radio safety edge kit rubber h 90
More information on page 72

Ref. 9019611

Packs

							Packs per pallet
	Elixo 800 230 V RTS motor	Keygo RTS	Metal template	Keytis ^{MS} 2 RTS	Orange light Eco Pro	Photocells Master Pro Bitech	
		Ref. 1841064	Ref. 9018678	Ref. 1841026	Ref. 9020138	Ref. 1841155	
Standard pack	•	• 2x	•	-	-	-	36
Ref. 1216454							
Eco Comfort pack	•	-	•	• 2x	•	•	36
Ref. 1216455							